

HOLLYMATIC INTRODUCES THE CONVENIENT MEAT GRINDER

The Hollymatic **GMG 150**, the first truly
automatic compact grinder.

XD 89/1 (5)



REC'D. DEC. 22, 1971

CONVENIENT TO CLEAN

You don't need tools to clean a **GMG 150**. Lift a lever, and the tub comes off. Lift two more levers and the grinding head slides out. Pull out a shaft and the mixing tumbler lifts out.


Stainless steel tub and covers make the **GMG 150** easy to clean. And it's convenient to move it to the cleaning location: optional casters, low weight and compact size make it simple to roll.

CONVENIENT TO OPERATE

Hollymatic introduced the first truly automatic mixer/grinder, the GMG. Now Hollymatic introduces the **GMG 150**, a more compact version at an even more economical price. The **GMG 150** has all the features of the famous GMG, and more. Anyone can operate the **GMG 150**. Just put trimmings in, and it's all automatic: first grind, lean and fat blend, and final grind. The **GMG 150** grinds itself empty; there's no stamping meat with a stick. And it produces 80 lbs., first ground, mixed, and final ground in less than two minutes. The optional footswitch makes rosetting or bulking a simple one-man operation.



THE CONVENIENT MACHINE

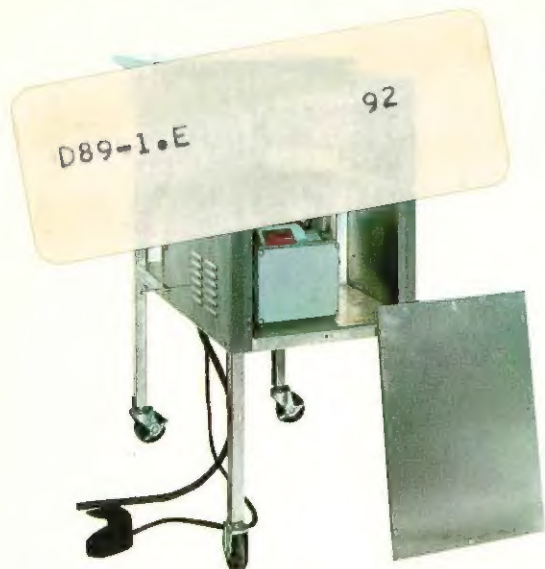

THE **GMG 150** IS CONVENIENT TO SERVICE


Bearings are all lubricated from a central block for ease of service. The drive is sealed away from the food zone, so meat or juices just can't get in. The drive area is immediately accessible by lifting off the rear panel for the infrequent servicing required.

The drive itself, a simplified version of the famous Hollymatic GMG mixer/grinder, has proven its reliability and rugged durability.

REC'D. DEC. 22, 1971

GET THE BEST GROUND MEAT
A MACHINE CAN PRODUCE.
USE THE CONVENIENT
MACHINE.
HOLLYMATIC GMG 150.

SPECIFICATIONS

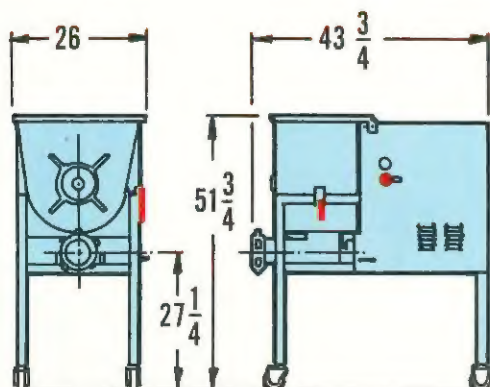

Hollymatic®

Worldwide distribution outside U.S.A. and
Canada: Hollymatic AG, P.O. Box 83,
6440 Brunnen, Switzerland

HOLLYMATIC CORPORATION / PARK FOREST, ILLINOIS 60466

MOTOR

208 V., 60 cy., 1 Ph.
208 V., 60 cy., 3 Ph.
230 V., 60 cy., 3 Ph.
460 V., 60 cy., 3 Ph.
575 V., 60 cy., 3 Ph.
380 V., 50 cy., 3 Ph.

3 Hp. or 5 Hp.

GRINDING HEAD

#42 Head Standard #52 Head Optional

WEIGHT

455 pounds.

CONSTRUCTION

Tub and covers, stainless steel. All other metal parts non-corrosive.

OPERATION

Controls may be ordered for right or left hand operation.